


## PISKO BACK GUARD

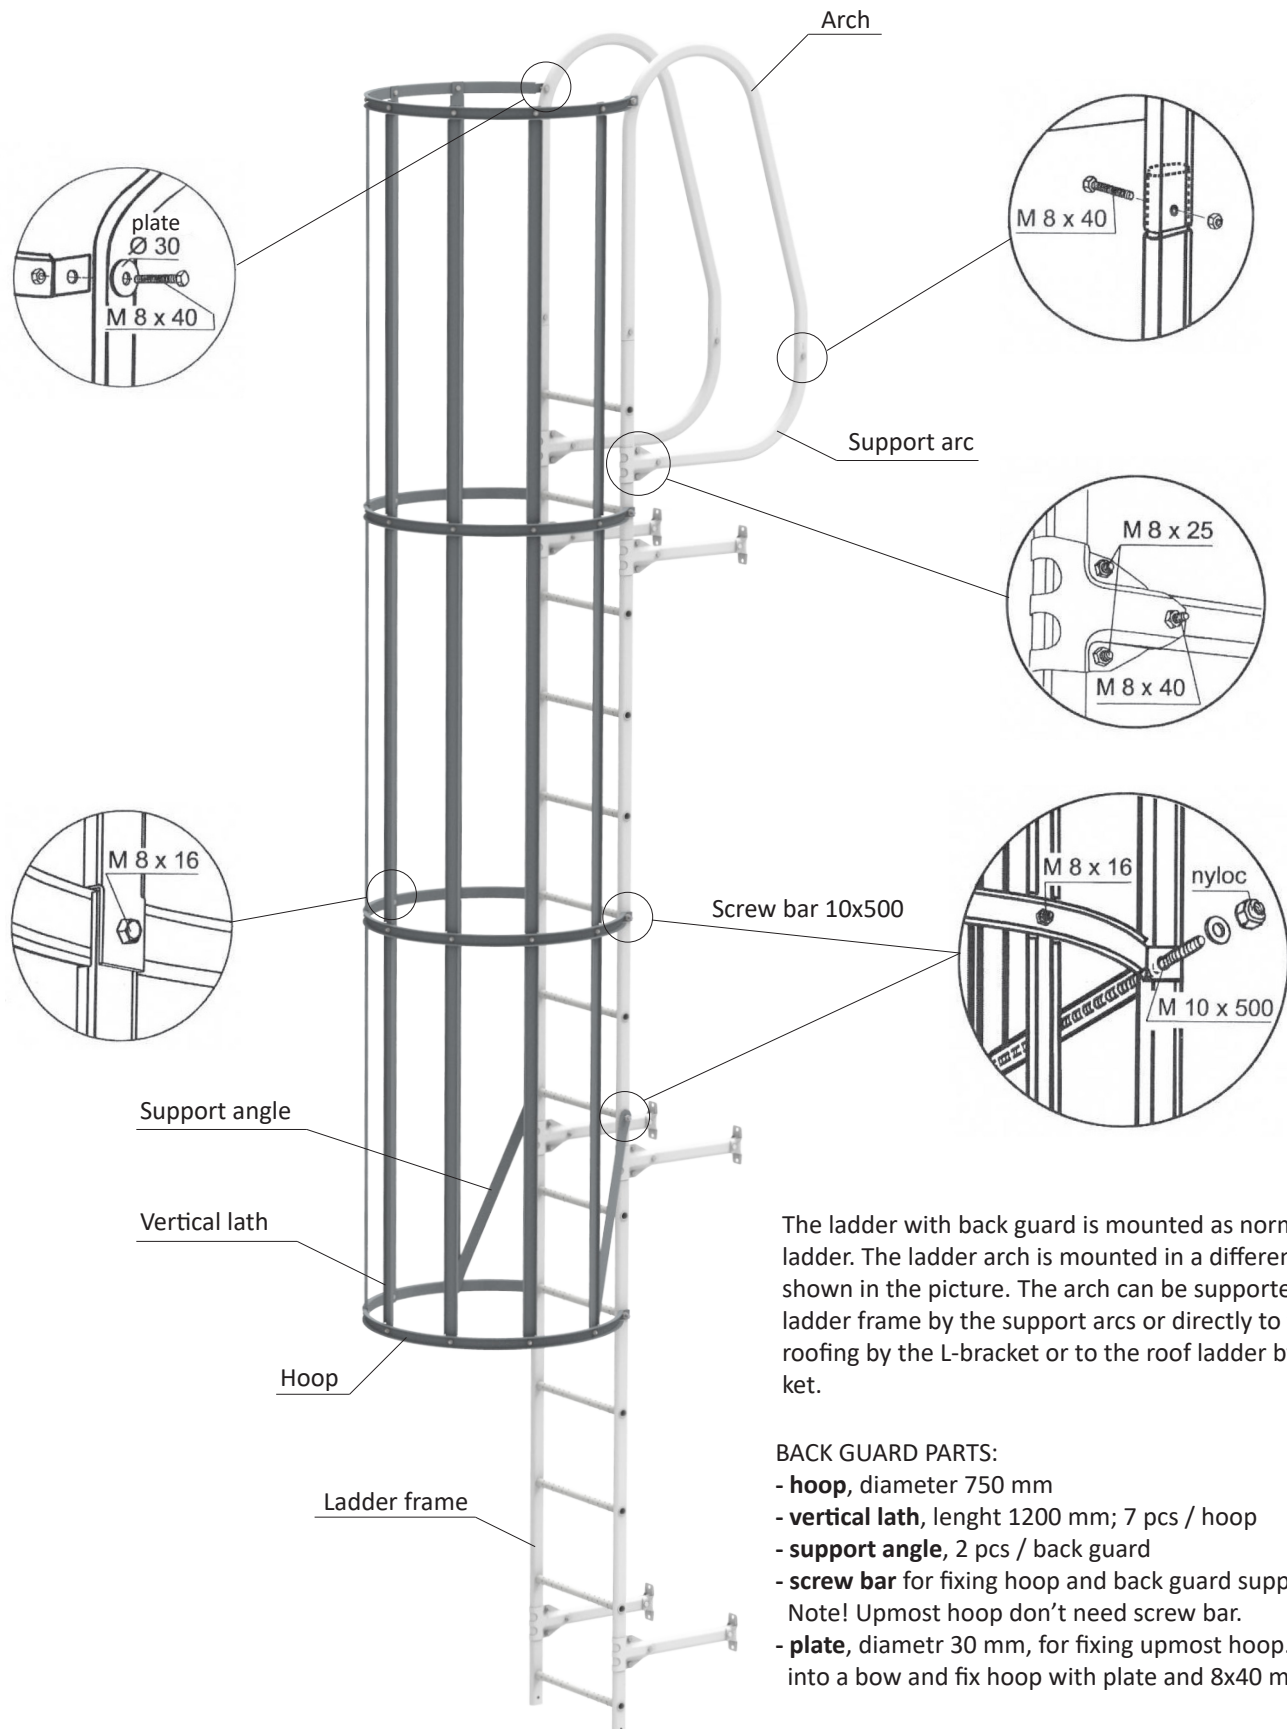

The ladder with back guard is mounted as normal ladder. The ladder arch is mounted in a different way, as shown in the picture. The arch can be supported on the ladder frame by the support arcs or directly to the roofing by the L-bracket or to the roof ladder by U-bracket.

### BACK GUARD PARTS:

- **hoop**, diameter 750 mm
- **vertical lath**, length 1200 mm; 7 pcs / hoop
- **support angle**, 2 pcs / back guard
- **screw bar** for fixing hoop and back guard support angle. Note! Upmost hoop don't need screw bar.
- **plate**, diameter 30 mm, for fixing upmost hoop. Drill hole into a bow and fix hoop with plate and 8x40 mm bolt.