

## PISKO SAFEGRIP ROOF LADDER FOR PROFILE METAL SHEET ROOF, 1337

Pisko roof ladders for profile metal sheet roofs are used as extensions of wall-mounted ladders and/or roof walkways to create safe access paths on profile metal sheet roofs. It must be possible to move safely on the roof from the eaves to the ridge, chimney, sunroofs and other areas requiring maintenance. Pisko ladders have a rung width of 400 mm and rung diameter of 25 mm.

### INSTALLATION



Roof ladders must be attached to the load-bearing structures of the roof, at least at the top and bottom ends of the ladder (EN 12951, Section 5.3.1). Due to the strain created by snow loads, we recommend the use of more fastenings.

If the ladder is to be extended, the extension must be attached to the top end of the ladder. Secure the joint with M8x40 hexagon bolt and M8 hexagon nut.

Roof ladders are fastened to profile metal roofs using roof ladder fasteners.



- Place the roof ladder rubber seals at the base of the roof ladder fasteners.
- Install the roof ladder fasteners on the ladder frame at intervals of approximately 1400 mm.
- Then attach the top and bottom ends of the roof ladder fasteners to the battens with 7x50 mm HVAC-screws.
- Finish by carefully positioning the roof ladder fasteners in their places on the battens, and tighten them on the ladder frame. Attach roof ladder fasteners to the ladder frame with M8x30 hexagon bolt.

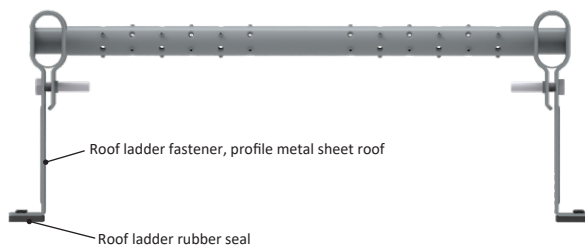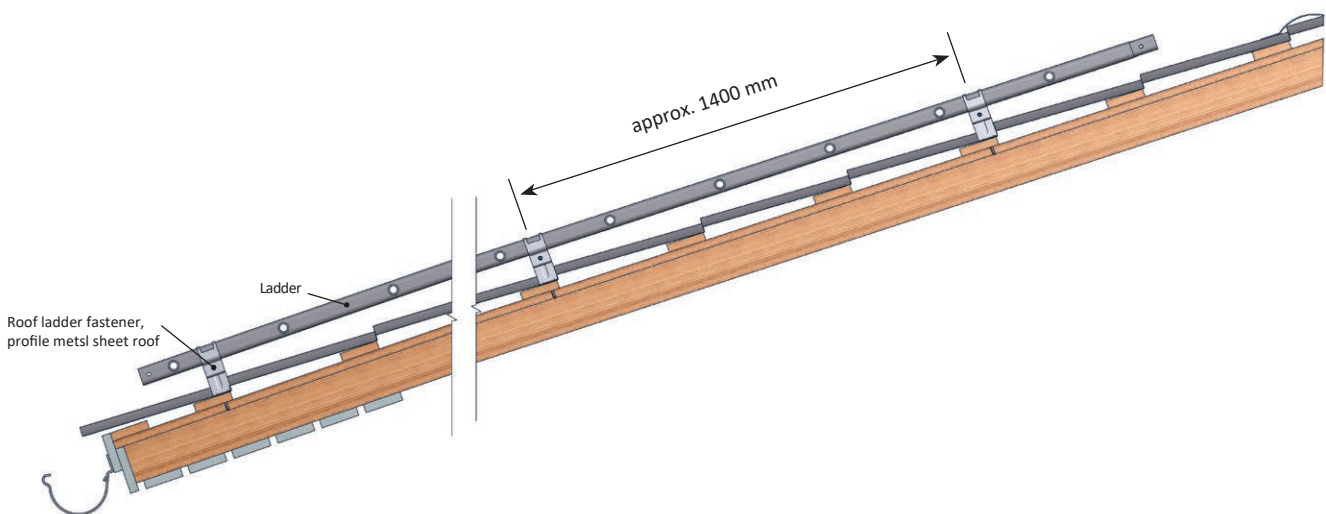

Part	Description
1	HVAC-screw, 7x40 or 7x50 mm
2	Roof ladder fastener, profile metal sheet roof
3	Roof ladder rubber seal
4	Pisko SafeGrip ladder
5	Hexagon bolt M8x30 hot-dip galvanized

## USE

Roof ladder must be used when the roof inclination is more than 1:8. If the height of the building is more than 9 meters, safety rope fixing structures must be provided (Ministry of the Environment Decree on the safe use of buildings on January 1, 2018). Standard EN 12951 provides two installation options for roof ladders: class 1 and class 2. Using personal fall protection equipment, a person is only allowed to attach themselves to a roof ladder, which is installed in accordance with class 2.

The Pisko roof ladder for profile metal sheet roof conforms to standard EN 12951, having undergone static and dynamic tests per class 2. A safety rope can be fixed to a roof ladder, which is installed in accordance with class 2. Moreover, the following must be taken into consideration when using a safety rope:

- Only one person at a time, with a total weight of max. 150 kg, including the equipment, is allowed to fix a safety rope to the rung of the roof ladder.
- The safety rope must not be fixed to the free spools below the lowest fastener that is fixed to the roofing / roof boards or to the roof ladder fasteners.
- The safety rope may only be used towards the eave on the pitched roof area where the roof ladder is installed.

## MAINTENANCE

As long as the Pisko products are installed in accordance with the instructions, they have a long life cycle and they are safe to use, guaranteed by the continuous quality control and R&D by Piristeel Oy. In order to ensure the safe use and the long life cycle, the property owner must perform the annual inspection and maintenance procedures and ensure that the snow load is not exceeded, as specified in the regulations.

**The property owner must check the roof safety products and personal protective equipment, installed in accordance with class 2, by outsourcing this annually to a person authorized by the manufacturer.**

The annual inspection and maintenance areas for the Pisko products:

- Check the tightness of joints, connections and attachments.
- Check the roof attachments (fixings).
- Ensure any excessive snow load is cleared to minimize the strain on structures and attachment points (as necessary; there might be a need several times during the winter). As necessary, clear the roof ladders of snow and ice.
- Check the paintwork and zinc coating of the products; repair faults and touch up paintwork if necessary
- Replace or repair any damaged or faulty parts as soon as possible.

<b>Piristeel Oy</b> <b>Metallitie 4, 62200 Kauhava</b> <b>Finland</b> <b>18</b>
<b>EN 12951</b> Pisko SafeGrip roof ladder for profile metal sheet roof, 1337 <b>TB</b> <b>Mechanical strength:</b> Class 1 and Class 2 <b>Fire safety:</b> Class A1 <b>Durability:</b> Z275 + powder coating 80µm <b>Resistance to external fire:</b> Estimated to meet the requirement

This product has been installed by

COMPANY

INSTALLER

According to class 1:

According to class 2: