

PISKO SAFEGRIP ROOF LADDER FOR PROFILED SHEETS, HEIGHT UP TO 70 MM

Pisko roof ladders for profiled sheets, up to 70 mm of height are used as extensions of wall-mounted ladders and/or roof walkways to create safe access paths on a profiled sheet roofs (profile height max. 70 mm). It must be possible to move safely on the roof from the eaves to the ridge, chimney, sunroofs and other areas requiring maintenance. Pisko ladders have a rungwidth of 400 mm and rung diameter of 25 mm.

INSTALLATION

Roof ladders must be attached to the load bearing structures of the roof, at least at the top and bottom ends of the ladder (EN 12951, Section 5.3.1). Due to the strain created by snow loads, we recommend the use of more fastenings.

When the profiled sheet acts as a non-load bearing roof, or it is impossible to tell whether the structure has been executed as a load bearing structure, the roof ladder fasteners shall be installed by fixing the fasteners directly to the battens. The batten fastening is also recommended installation method with profiled sheets designed and implemented as a load bearing structure. The battens should be minimum 32x100 mm (good quality structural wood) to meet the class 2 installation requirements. Before installing the roof ladder fasteners, the position and quality of the battens must be ensured.

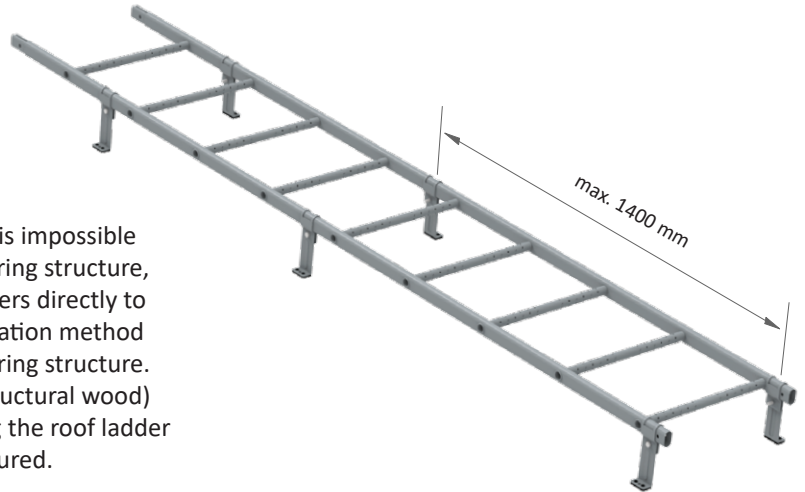


figure 1

- Install the roof ladder fasteners on the ladder frame at max. 1400 mm intervals (figure 1).
- Place the EPDM Rubber sealants at the base of the roof ladder fasteners and attach at least the top and bottom ends of the roof ladder fasteners to the battens with one 7x40 mm HVAC-screw.
- The roof ladder fasteners between the top and bottom ends are accurately positioned in the center of the battens (figure 3).
- Attach the roof ladder fasteners with M8x30 hexagon bolt to the ladder frame (figure 2).
- If necessary, the extension of the ladder frame shall be done by adding the ladder frame to the top of the previous frame (figure 4). Secure the joint with M8x40 hexagon bolt and M8 hexagon nut (figure 4).

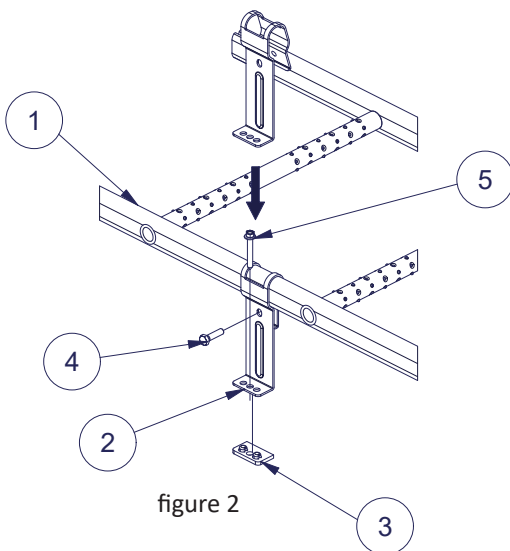


figure 2

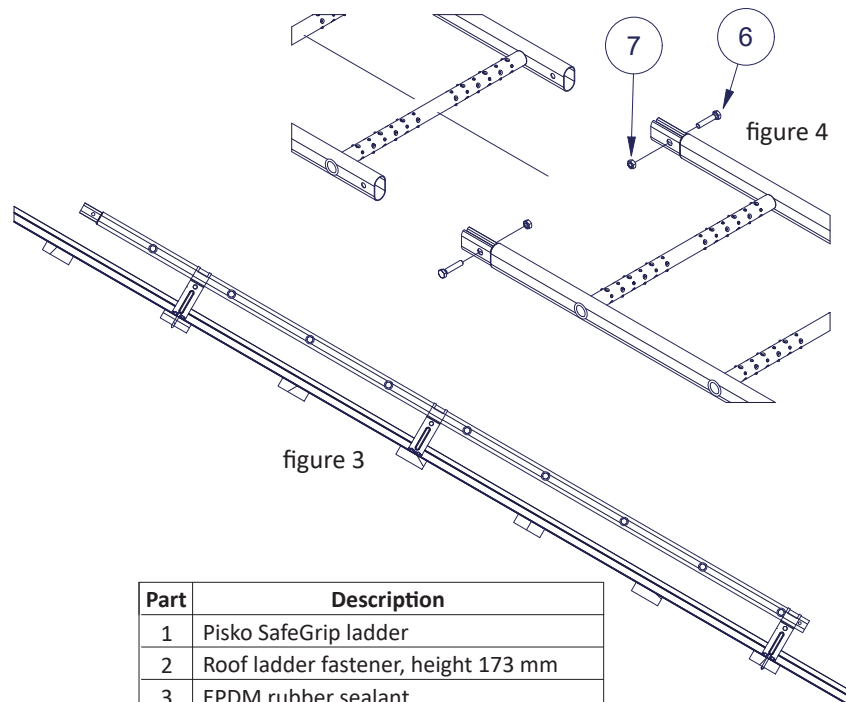


figure 3

figure 4

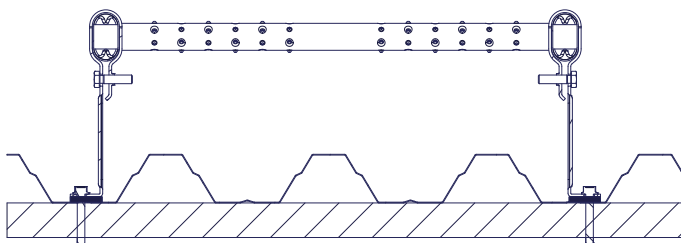


figure 5


Part	Description
1	Pisko SafeGrip ladder
2	Roof ladder fastener, height 173 mm
3	EPDM rubber sealant
4	Hexagon bolt M8x30 mm
5	HVAC-screw 7x40 mm
6	Hexagon bolt M8x40, hot-dip galvanized
7	Hexagon nut M8, hot-dip galvanized

USE

Roof ladder must be used when the roof inclination is more than 1:8 and they are also recommended for roofs with lower slopes than this. If the height of the building is more than 9 meters, safety rope fixing structures must be provided (Ministry of the Environment Decree on the safe use of buildings on January 1, 2018). Standard EN 12951 provides two performance classes for roof ladders: class 1 and class 2. Class 1 means that the product is suitable for use as access way and class 2 means that the product can also be used as safety rope anchoring point. Using personal fall protection equipment, a person is only allowed to attach themselves to a roof ladder with class 2 performance level. Pisko SafeGrip roof ladder has been dimensioned against 1,5 kN (~150 kg) concentrated load, i.e. working load, required by the standard.

The Pisko SafeGrip roof ladder for profiled sheets, up to 70 mm of height conforms to standard EN 12951, having undergone static and dynamic tests per class 2. An appropriate safety rope can be fixed to a roof ladder, which is installed in accordance with class 2. The safety rope must be intended to be used as a personal safety rope and it must conform to relevant standards e.g. EN 353-2 and should be equipped with a shock absorber (EN 355). On Pisko SafeGrip ladders, the safety rope anchoring point is the Pisko SafeLine wire system's glider (see separate installation instructions) or the ladder frame. When using the safety rope, the following points must be taken into account:

- The ladder has undergone periodic inspections and is suitable for use as safety rope anchoring point
- Only safety ropes (e.g. EN 353-2) or retractable lanyards (EN 360) that are meant to be used as a personal fall protection equipment should be used
- The Pisko SafeLine installed on the roof ladder may only be used by one person at a time, for more information see the Pisko SafeLine instructions for installation, use and maintenance
- If the ladder is not equipped with the Pisko SafeLine system, the recommended safety rope fixing point is the side stile of the ladder
- Only one person at a time, with a total weight of max. 100 kg, including the equipment, is allowed to fix a safety rope to the roof ladder.
- The safety rope must be fixed to the roof ladder only in the space between the roof ladder fasteners that connect the ladder to the roof structure.
- The safety rope shall never be fixed to the support feet of the ladder
- The safety rope may only be used towards the eave on the pitched roof area where the roof ladder is installed

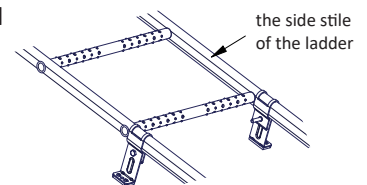

MAINTENANCE

As long as the Pisko products are installed in accordance with the instructions, they have a long life cycle and they are safe to use, guaranteed by the continuous quality control and R&D by Piristee Oy. In order to ensure the safe use and the long life cycle, the property owner must perform the annual inspection and maintenance procedures and ensure that the snow load is not exceeded, as specified in the regulations.

To ensure the durability of the performance of the products, the property owner should have the class 2 roof safety products inspected annually by a person authorised by the manufacturer.

The annual inspection and maintenance areas for the Pisko products:

- Check the tightness of the joints and points of attachment.
- Check the fastenings in the roof.
- Remove the excessive snow load in order to minimize the stress on structures and points of attachment (as necessary, several times during winter).
- As necessary, remove snow and ice from the ladder.
- Check the painted and galvanized product surfaces and, as necessary, repair local damages and perform touch-up painting.
- Replace or repair any damaged or faulty parts as soon as possible.

Piristee Oy Metallitie 4, 62200 Kauhava Finland 18
EN 12951 Pisko SafeGrip roof ladder for profile metal sheet roof, 1337 TB Mechanical strength: Class 1 and Class 2 Reaction to fire: Class A1 Durability: Z275 + powder coating 80 µm External fire performance: DTS

This product has been installed in accordance with the installation instructions by

Company	Installer	Date