


## Pisko SnowDefence 150 3 pipe snow guard for tile roof Bracket for tile roof (aux. batten) 150 Compact


### INSTALLATION

The brackets for tile roof 150 Compact (1) are attached to the roof structure by using an auxiliary batten. A 100 mm wide full-edged auxiliary batten is installed between the battens. The auxiliary batten must be at the same thickness as the batten (min. thickness 32 mm).


- The auxiliary batten is fixed to each roof chair with two 6x120 mm screws (7) and a DIN 440 M8 washer(8).
- The auxiliary batten must be fixed to at least three roof trusses.
- The distance between the auxiliary batten and the lower end of the bracket is approximately 540 mm.
- The edge of the bracket should be positioned approximately in line with the bottom edge of the tile, so that the load transmitted by the edge is placed on the most durable part of the tile. Please refer to the tile manufacturer's instructions.
- The bracket (1) is fixed to the auxiliary batten with three 7 x 50 mm HVAC screws (2), drilling a pre-hole is recommended to prevent the batten from slitting.

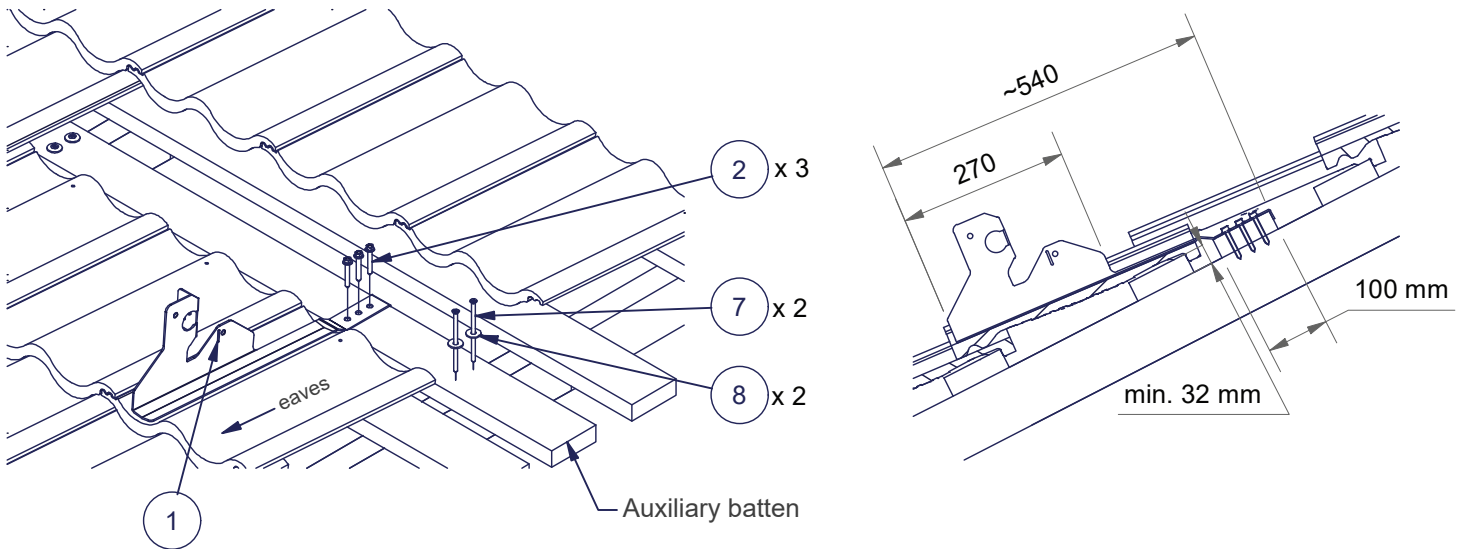


Distance between brackets is max. 1000 mm

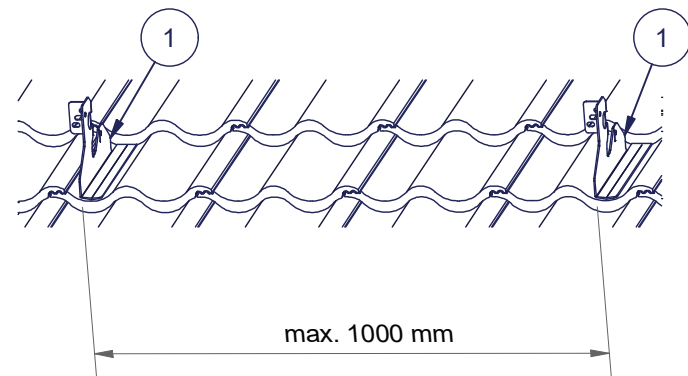


Attach the locking bracket for snow guard pipes (3) to each bracket (1) with two M8x16 bolts (4).

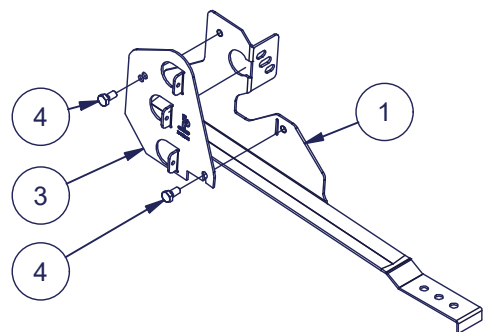


Slide the pipes (5) through the holes of the brackets. Maximum protrusion from the outermost bracket 200 mm.

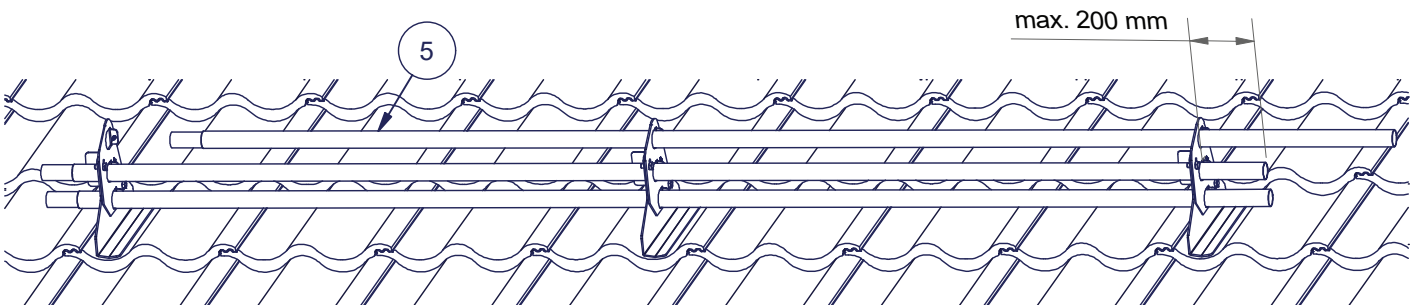

Fasten the pipes (5) to the outermost brackets (1) with three fixing screws (6) from fixing lugs on the locking bracket for snow guard pipes (3). This locks the pipes and pipe extensions together.

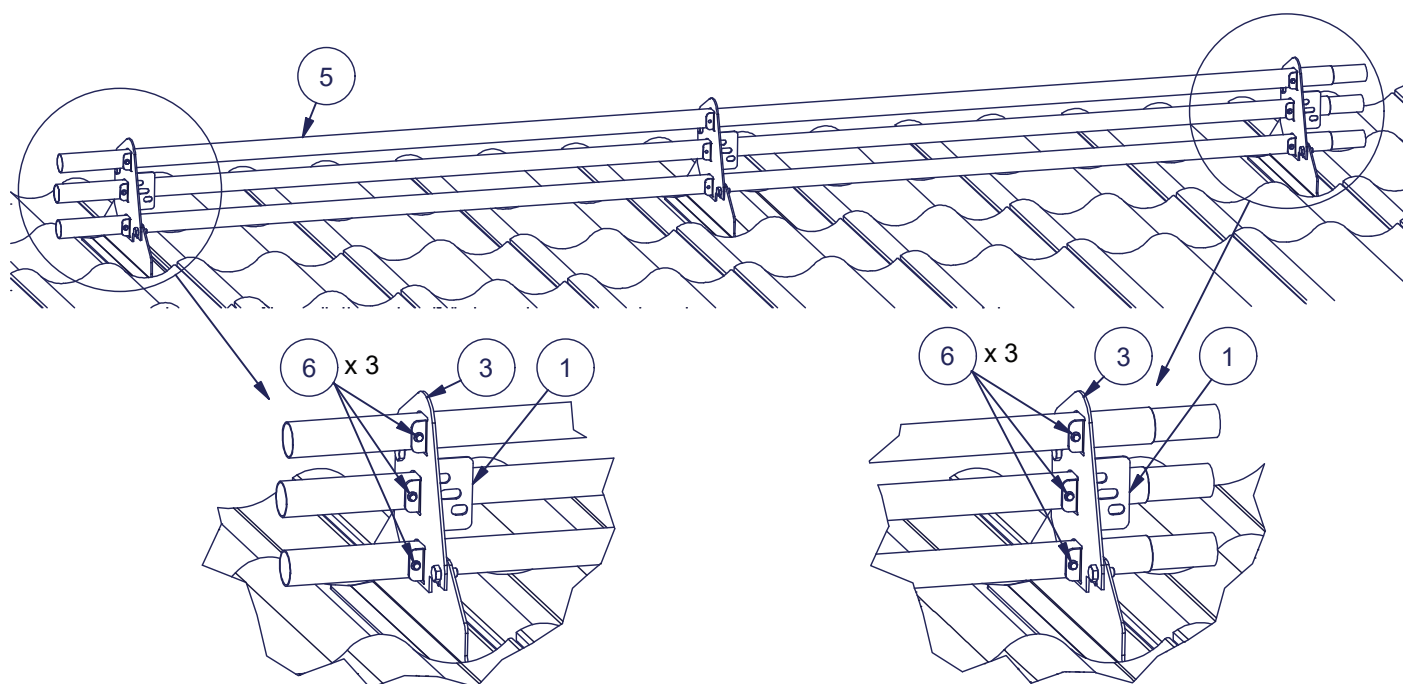

The extension of the pipes shall be done by sliding the pipe end with solid reducer inside the adjacent non-reduced pipe.



Part	Description
1	Bracket for tile roof (aux. batten) 150 Compact
2	HVAC screw 7x50 mm (for outdoor use)
3	Locking bracket for snow guard pipes
4	Bolt DIN 933 - M8 x 16 *
5	Snow guard pipe 32 mm / 3000 mm
6	Fixing screw e.g. 4,8x25 self-tapping farmer screw or 4,8x19 self-drilling screw ( for outdoor use)
7	Universal screw 6x120 mm (for outdoor use)
8	Washer DIN 440 M8 *

\* HDG or equal corrosion protection

## MAXIMUM LENGTH OF ROOF SLOPE (RT Reference Card 85-11132)


Indicative figures for the maximum distance (m) of the roof slope above the snow guard on a smooth surface. The maximum distance on coarse roofs, such as bitumen roofs can be increased by 1.3 – 1.5 times the stated amount. The snow load values shown are the actual snow loads on a roof.

Roof's inclination angle (°) and snow ratio (the ratio of the slope to the horizontal width of the roof pane)	Maximum length of slope above the snow guards					
The characteristic value of the snow load on the roof: 1,8 kN /m <sup>2</sup>						
Space between the snow guard fasteners	0,5 m	0,6 m	0,75 m	0,9 m	1,0 m	1,2 m
Roof's inclination angle and snow ratio						
< 15°, (1:3,7)	21,4	17,9	14,3	12,0	10,7	9,0
15... 22°, 1:3,7... 1:2,5	11,4	9,5	7,6	6,3	5,7	4,8
22... 27°, 1:2,5... 1:2	8,4	7,0	5,6	4,7	4,2	3,5
27... 37°, 1:2... 1:1,3	7,4	6,2	4,9	4,1	3,7	3,1
37... 45°, 1:1,3... 1:1	9,0	7,5	5,9	5,0	4,5	3,7
The characteristic value of the snow load on the roof: 2,0 kN /m <sup>2</sup>						
Space between the snow guard fasteners	0,5 m	0,6 m	0,75 m	0,9 m	1,0 m	1,2 m
Roof's inclination angle and snow ratio						
< 15°, (1:3,7)	19,1	16,1	12,9	10,8	9,6	8,1
15... 22°, 1:3,7... 1:2,5	10,2	8,6	6,9	5,7	5,1	4,3
22... 27°, 1:2,5... 1:2	7,6	6,3	5,1	4,2	3,8	3,2
27... 37°, 1:2... 1:1,3	6,7	5,6	4,4	3,7	3,3	2,8
37... 45°, 1:1,3... 1:1	8,2	6,8	5,3	4,5	4,1	3,3
The characteristic value of the snow load on the roof: 2,6 kN /m <sup>2</sup>						
Space between the snow guard fasteners	0,5 m	0,6 m	0,75 m	0,9 m	1,0 m	1,2 m
Roof's inclination angle and snow ratio						
< 15°, (1:3,7)	15,0	12,5	9,9	8,3	7,5	6,2
15... 22°, 1:3,7... 1:2,5	8,0	6,6	5,3	4,4	4,0	3,3
22... 27°, 1:2,5... 1:2	5,8	4,8	3,9	3,3	2,9	2,4
27... 37°, 1:2... 1:1,3	5,2	4,3	3,4	2,8	2,6	2,1
37... 45°, 1:1,3... 1:1	6,2	5,2	4,1	3,5	3,1	2,6

PICTURED IS AN EXAMPLE OF SNOW GUARDS BEING USED ACCORDING TO THE TABLE.

Maximum length of the slope  
above the snow guards: 4,7 m  
Roof angle 25°  
Snow load 1,8 kN/m<sup>2</sup>

Space between the snow guard  
fasteners: 900 mm



Maximum length of the slope  
above the snow guards: 3,3 m

Roof angle 25°  
Snow load 2,6 kN/m<sup>2</sup>

Space between the snow guard  
fasteners: 900 mm



Pisko Snow Guards are capable of bearing a load of at least 5 kN/m, in the direction of the inclined roof. By following the values in the table these requirements are fulfilled.

## MAINTENANCE

Pisko products are hard-wearing and safe to use, guaranteed by the ongoing quality control and development work by Piristeel Ltd, as well as correct installation of the products according to the manufacturer's instructions. To ensure the reliability and safety of the products, the property owner must carry out yearly inspection and maintenance procedures, and make sure that excessive snow load does not accumulate on the roof.

### Yearly maintenance inspection checklist for Pisko snow guards:

- Check the tightness of joints, connections and attachments.
- Check fixings to the roof
- Take care to regularly clean the accumulated debris and dirt in the snow guard (such as leaves)
- Ensure any excessive snow load is cleared to minimize the strain on structures and attachment points of snow guard (as necessary; there might be a need several times during the winter). Product durability in accordance with the certification certificate.
- Check the paintwork and zinc coating of the products; repair faults and touch up paintwork if necessary
- Replace or repair any damaged or faulty parts as soon as possible.