


Pisko SafeGrip roof ladder for steel roof with Pisko MultiFast Optim fastener

INSTALLATION

Place EPDM sealant strip (2) to the bottom of the MultiFast Optim bracket (1).

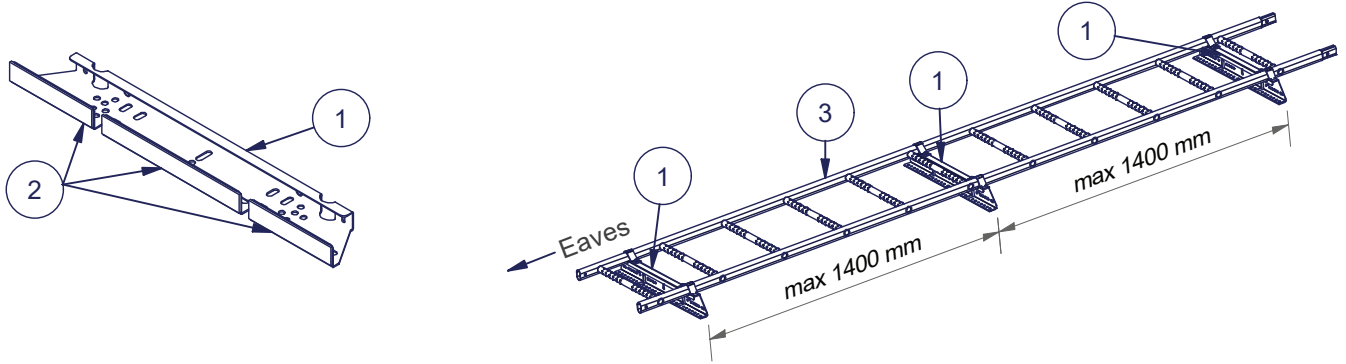

Install the MultiFast brackets (1) to the Pisko Safegrip ladder (3) frame.


- Min. 3 MultiFast brackets.
- The max. distance between the brackets is 1400 mm.
- The lowest and highest bracket should be installed between two lowest and two highest rungs of the ladder and must always be attached to the sheet metal roof.
- The narrowed ends of the stiles are placed towards the ridge of the roof.

Attach MultiFast Optim (1) to the ladder (3) with 2 x MultiFast stile bracket Optim (4). Insert the hook end of the stile bracket to oval hole on top of the MultiFast bracket, turn it around the stile of the ladder and fasten it with flange bolt (5).

The MultiFast bracket should be installed as close as possible to the underside of the rung, to ensure good usability of the ladder.


Notice the mounting direction of the MultiFast bracket.

Place the ladder to roof. When installing on tile patterned steel roof the MultiFast brackets should be placed close to the bottom edge of the pattern.

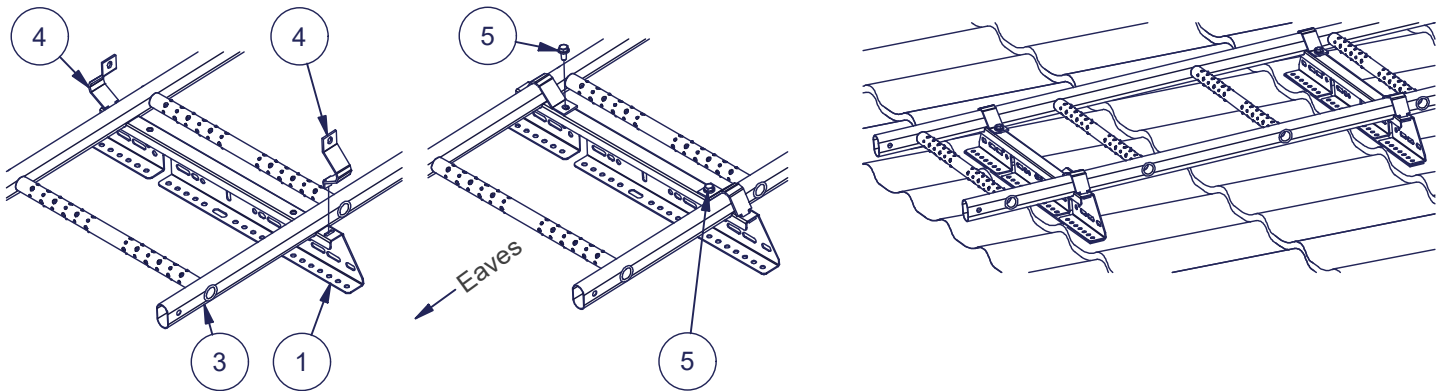

The ladder is attached to the roof with a steel roof fixing rod for MultiFast Optim (6).


- Min. 3 fixing rods.
- In areas of heavy snow loads it is recommended to use more than min. amount of fixing rods.
- The max. distance between steel roof fixing rods is approximately 5000 mm.
- The lowest and highest MultiFast Optim bracket must always be attached to the roof.

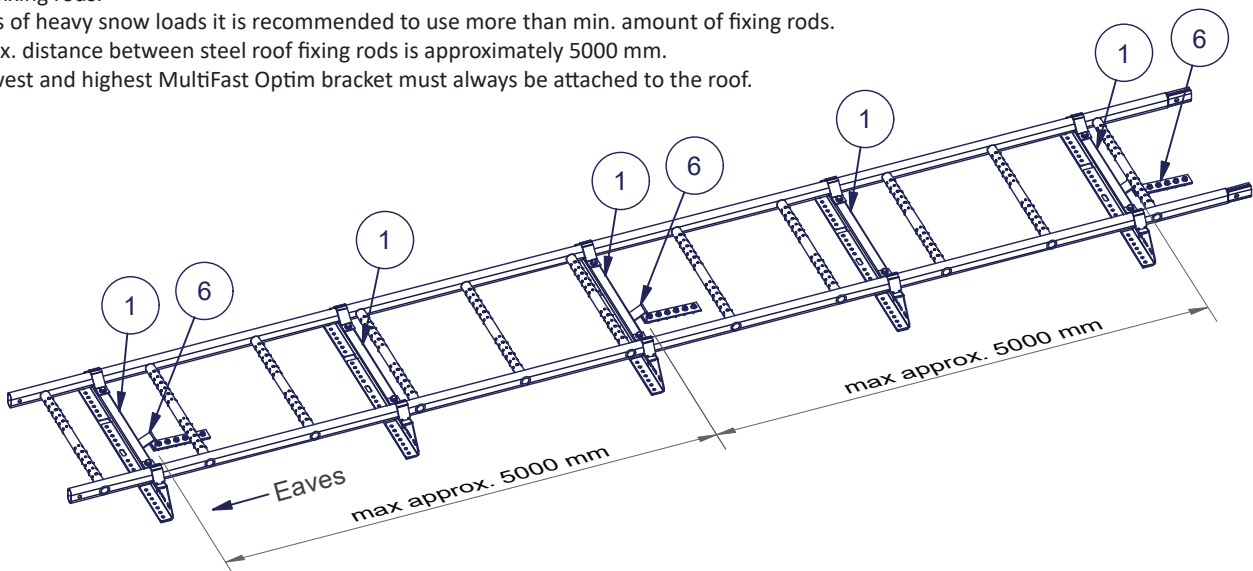


Place EPDM sealant strip (2) to the bottom of the steel roof fixing rod for MultiFast Optim (6). Attach fixing rod to the MultiFast with flange bolt (5) and flange nut (8). Fixing rod is attached to the top of the profile with 6 Pisko sheet metal screws of stainless steel (7) (Do not overtighten!).

* Note separate instructions for the profiled aluminium sheet roof.

In areas of heavy snow loads it is recommended to attach ladders to roof with more than minimum amount of Steel roof fixing rods. 2 fixing rods / MultiFast bracket can also be used.

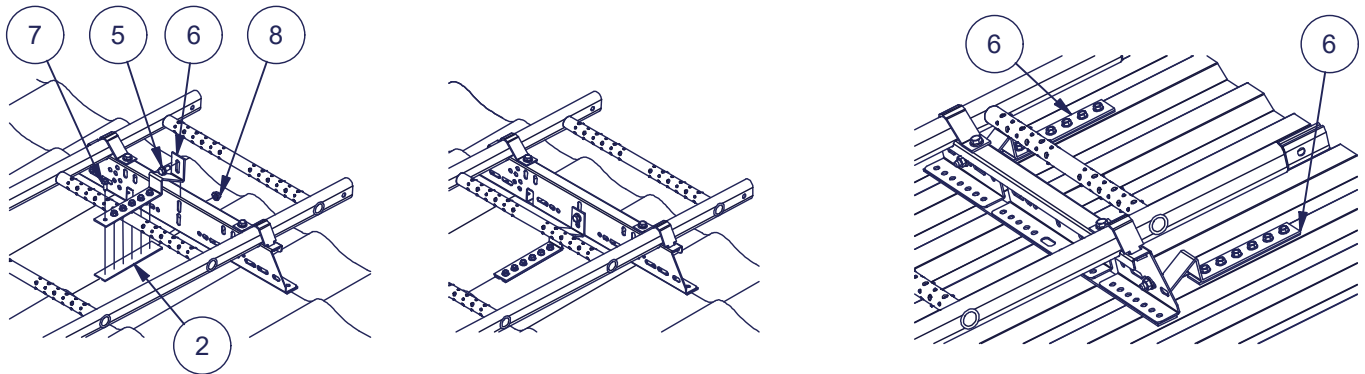

If the ladder is to be extended, the extension must be attached to the top end of the ladder (3). Secure the joint with 2 M8x40 bolts (9) and M8 nuts (10).

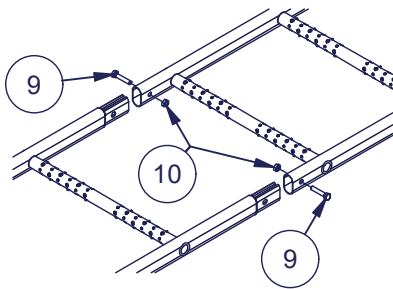

Part	Description
1	MultiFast Optim
2	Sealant strip
3	Pisko safegrip ladder
4	MultiFast Stile bracket Optim
5	Flange bolt DIN 6921 - M8 x 16 HDG *
6	Steel roof fixing rod for MultiFast Optim
7	Pisko sheet metal screw 6,3x19 A2
8	Flange nut DIN 6923 - M8 HDG *
9	Bolt DIN 933 - M8x40 HDG *
10	Nut DIN 934 - M8 HDG *

* HDG or equal corrosion protection

Requirements for min. raw material thickness:


- Steel - 0,5 mm
- Aluminium - 0,6 mm

ASSEMBLY - Aluminium profiled sheet metal roof


When installing roof ladders on aluminium roof with Multifast Optim (1), one of two fastening methods below must be used:

A: Steel roof fixing rods (6) must be fastened on top of the extension where two aluminium sheets overlap.

B: 2 Fixing rods (6) / Multifast bracket on single aluminium sheet.

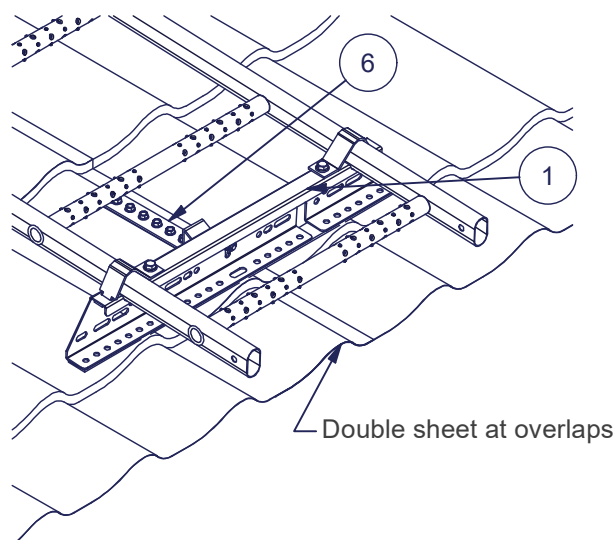

OR

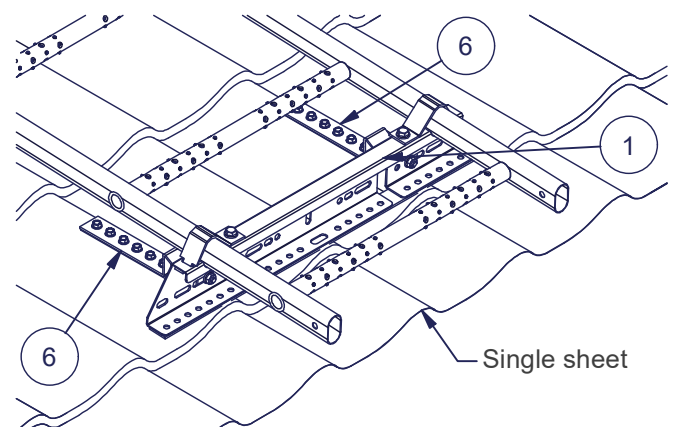


USE

Roof ladder must be used when the roof inclination is more than 1:8 and they are also recommended for roofs with lower slopes than this. If the height of the building is more than 9 meters, safety rope fixing structures must be provided (Ministry of the Environment Decree on the safe use of buildings on January 1, 2018). Standard EN 12951 provides two performance classes for roof ladders: class 1 and class 2. Class 1 means that the product is suitable for use as access way and class 2 means that the product can also be used as safety rope anchoring point. Using personal fall protection equipment, a person is only allowed to attach themselves to a roof ladder with class 2 performance level. Pisko SafeGrip roof ladder has been dimensioned against 1,5 kN (~150 kg) concentrated load (load from the user).

The Pisko SafeGrip roof ladder for steel roof with Pisko MultiFast Optim fastener conforms to standard EN 12951, having undergone static and dynamic tests per class 2. An appropriate safety rope can be fixed to a roof ladder, which is installed in accordance with class 2. The safety rope must be intended to be used as a personal safety rope and it must conform to relevant standards such as e.g. EN 353-2 and should be equipped with a shock absorber (EN 355). On Pisko SafeGrip ladders, the safety rope anchoring point is the Pisko SafeLine wire system's glider (see separate installation instructions) or the ladder frame. When using the safety rope, the following points must be taken into account:

- The ladder has undergone periodic inspections and is suitable for use as safety rope anchoring point
- Only safety ropes (e.g. EN 353-2) or retractable lanyards (EN 360) that are meant to be used as a personal fall protection equipment should be used
- The Pisko SafeLine installed on the roof ladder may only be used by one person at a time, for more information see the Pisko SafeLine instructions for installation, use and maintenance
- If the ladder is not equipped with the Pisko SafeLine system, the recommended safety rope fixing point is the side stile of the ladder
- Only one person at a time, with a total weight of max. 100 kg, including the equipment, is allowed to fix a safety rope to the roof ladder.
- The safety rope must be fixed to the roof ladder only in the space between the roof ladder fasteners that connect the ladder to the roof structure.
- The safety rope shall never be fixed to the support foots of the ladder
- The safety rope may only be used towards the eave on the pitched roof area where the roof ladder is installed

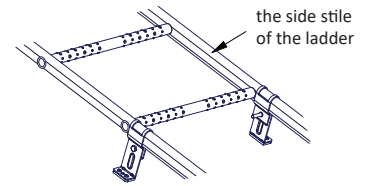

MAINTENANCE

Pisko products are hard-wearing and safe to use, guaranteed by the ongoing quality control and development work by Piristeel Ltd, as well as correct installation of the products according to the manufacturer's instructions. To ensure the reliability and safety of the products, the property owner must carry out yearly inspection and maintenance procedures, and monitor that the snow load specified by the regulations is not exceeded.

To ensure the durability of the performance of the products, the property owner should have the class 2 roof safety products inspected annually by a person authorised by the manufacturer.

The annual inspection and maintenance areas for the Pisko roof ladders:

- Check the tightness of the joints and points of attachment.
- Check the roof attachments (fixings).
- Ensure any excessive snow load is cleared to minimize the strain on structures and attachment points (as necessary; there might be a need several times during the winter).
- As necessary, clear the roof ladders of snow and ice.
- Check the the painted and galvanized product surfaces and, as necessary, repair local damages and perform touch-up painting.
- Replace or repair any damaged or faulty parts as soon as possible.

CE
Piristeel Oy Metallitie 4, 62200 Kauhava Finland 24
EN 12951 Pisko SafeGrip ladder for steel roofs with Pisko MultiFast Optim bracket 1390 TB Mechanical strength: Class 1 and Class 2 Reaction to fire: Class A1 Durability: Z275 + powder coating 80 µm External fire performance: DTS

This product has been installed in accordance with the installation instructions by

Company	Installer	Date