




Place the Tile roof fixing rod for MultiFast Optim (6) in the groove on the bottom of the roof tile.
Attach the fixing rod to underboarding with 5 Pisko fixing screws (7).

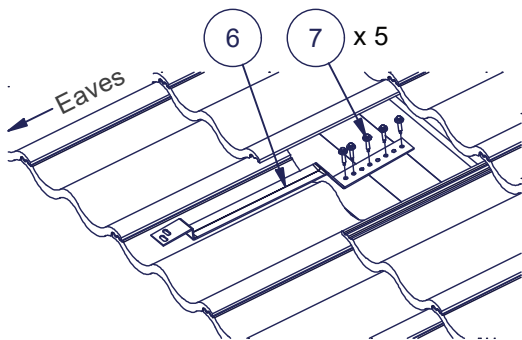

Connect the Tile roof fixing rods (6) to the MultiFast brackets (1) with flange bolt (5) and flange nut (8) through the round Ø8 mm holes in the MultiFast bracket.
*Do not use the oval hole in the MultiFast bracket!


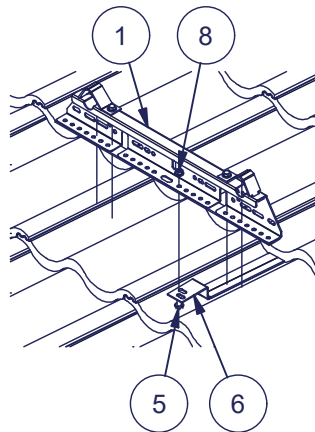


MultiFast bracket with 1 fixing rod

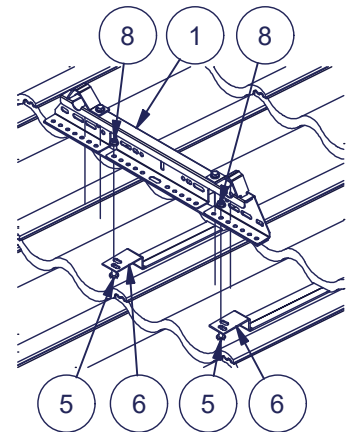


MultiFast bracket with 2 fixing rods

If the ladder is to be extended, the extension must be attached to the top end of the ladder (3). Secure the joint with 2 M8x40 bolts (9) and M8 nuts (10).

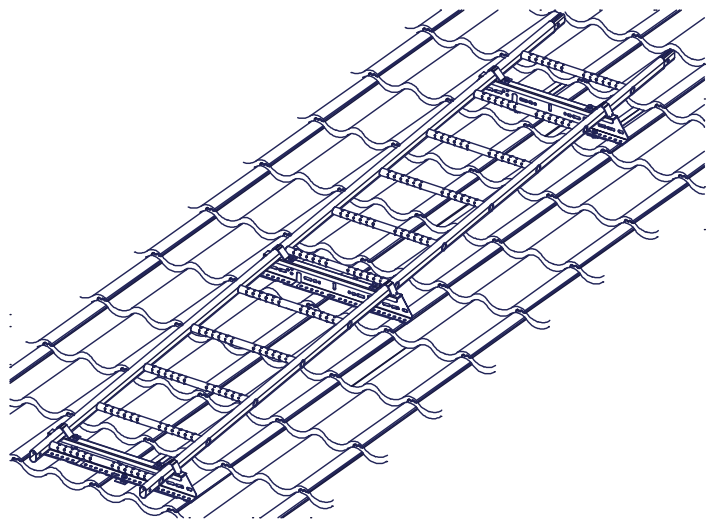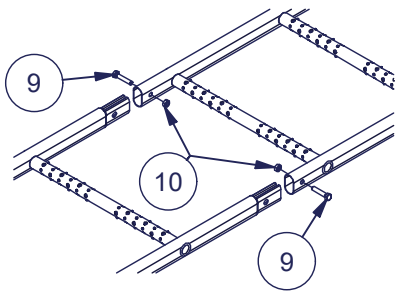

INSTALLATION ON 1 BULGE TILES

- The MultiFast Optim bracket must rest on 3 profile tops.
- 2 tile roof fixing rods on the highest MultiFast bracket
- Fixing rods that come below are fastened alternately in a left-right pattern
- Other requirements for installation are the same as previously mentioned in the instructions.

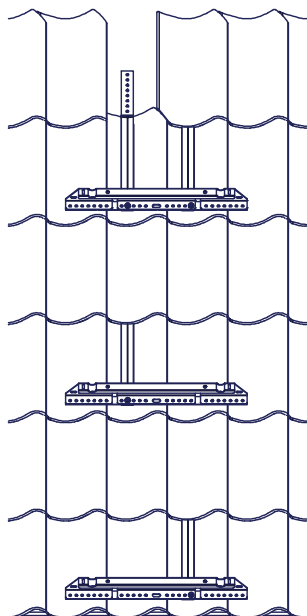

Part	Description
1	MultiFast Optim
2	Adhesive sealant / Pisko 2+1 sealant
3	Pisko safegrip ladder
4	MultiFast Stile bracket Optim
5	Flange bolt DIN 6921 - M8 x 16 HDG *
6	Tile roof fixing rod for MultiFast Optim
7	Pisko fixing screw 6,5x38 mm
8	Flange nut DIN 6923 - M8 HDG *
9	Bolt DIN 933 - M8x40 HDG *
10	Nut DIN 934 - M8 HDG *


* HDG or equal corrosion protection

USE

Roof ladder must be used when the roof inclination is more than 1:8 and they are also recommended for roofs with lower slopes than this. If the height of the building is more than 9 meters, safety rope fixing structures must be provided (Ministry of the Environment Decree on the safe use of buildings on January 1, 2018). Standard EN 12951 provides two performance classes for roof ladders: class 1 and class 2. Class 1 means that the product is suitable for use as access way and class 2 means that the product can also be used as safety rope anchoring point. Using personal fall protection equipment, a person is only allowed to attach themselves to a roof ladder with class 2 performance level. Pisko SafeGrip roof ladder has been dimensioned against 1,5 kN (~150 kg) concentrated load (load from the user).

The Pisko SafeGrip roof ladder for tile roof with Pisko MultiFast Optim fastener conforms to standard EN 12951, having undergone static and dynamic tests per class 2. An appropriate safety rope can be fixed to a roof ladder, which is installed in accordance with class 2. The safety rope must be intended to be used as a personal safety rope and it must conform to relevant standards such as e.g. EN 353-2 and should be equipped with a shock absorber (EN 355). On Pisko SafeGrip ladders, the safety rope anchoring point is the Pisko SafeLine wire system's glider (see separate installation instructions) or the ladder frame. When using the safety rope, the following points must be taken into account:

- The ladder has undergone periodic inspections and is suitable for use as safety rope anchoring point
- Only safety ropes (e.g. EN 353-2) or retractable lanyards (EN 360) that are meant to be used as a personal fall protection equipment should be used
- The Pisko SafeLine installed on the roof ladder may only be used by one person at a time, for more information see the Pisko SafeLine instructions for installation, use and maintenance
- If the ladder is not equipped with the Pisko SafeLine system, the recommended safety rope fixing point is the side stile of the ladder
- Only one person at a time, with a total weight of max. 100 kg, including the equipment, is allowed to fix a safety rope to the roof ladder.
- The safety rope must be fixed to the roof ladder only in the space between the roof ladder fasteners that connect the ladder to the roof structure.
- The safety rope shall never be fixed to the support foots of the ladder
- The safety rope may only be used towards the eave on the pitched roof area where the roof ladder is installed

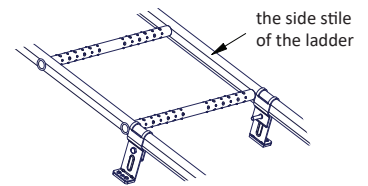

MAINTENANCE

Pisko products are hard-wearing and safe to use, guaranteed by the ongoing quality control and development work by Piristeel Ltd, as well as correct installation of the products according to the manufacturer's instructions. To ensure the reliability and safety of the products, the property owner must carry out yearly inspection and maintenance procedures, and monitor that the snow load specified by the regulations is not exceeded.

To ensure the durability of the performance of the products, the property owner should have the class 2 roof safety products inspected annually by a person authorised by the manufacturer.

The annual inspection and maintenance areas for the Pisko roof ladders:

- Check the tightness of the joints and points of attachment.
- Check the roof attachments (fixings).
- Ensure any excessive snow load is cleared to minimize the strain on structures and attachment points (as necessary; there might be a need several times during the winter).
- As necessary, clear the roof ladders of snow and ice.
- Check the the painted and galvanized product surfaces and, as necessary, repair local damages and perform touch-up painting.
- Replace or repair any damaged or faulty parts as soon as possible.

CE
Piristeel Oy Metallitie 4, 62200 Kauhava Finland 24
EN 12951 PPisko SafeGrip roof ladder for tile roof with Pisko MultiFast Optim fixed to the bottom boarding 1386 TB Mechanical strength: Class 1 and Class 2 Reaction to fire: Class A1 Durability: Z275 + powder coating 80 µm External fire performance: DTS

This product has been installed in accordance with the installation instructions by

Company	Installer	Date