


## Roof ridge safety rail with pipe for waterproofing membrane roof

### ASSEMBLY


Install the mounting plates (1) on waterproofing membrane roof according to the assembly instruction of the mounting plate on waterproofing membrane roof.

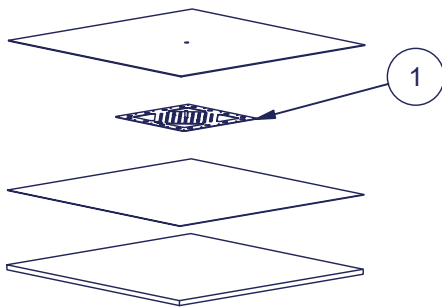


Distance between the mounting plates:

- Min. 550 mm
- Max. 1200 mm


The recommended location for the roof ridge safety rail is close to the roof ridge. If the roof ridge safety rail is installed lower on the roof, the product will start to act like a snow guard. In this case, it is recommended to use a shorter bracket spacing.

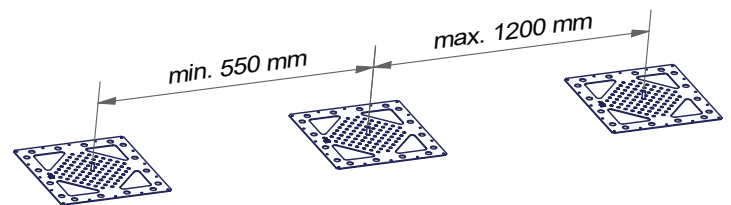


It is recommended to install e.g. an EPDM-sealant strip (3) or similar between the bracket and waterproofing member.

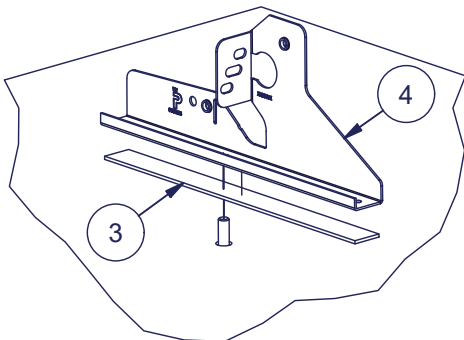


Install Bracket (4) to mounting plate bolt (2) with stainless steel M10 flange nut (5).

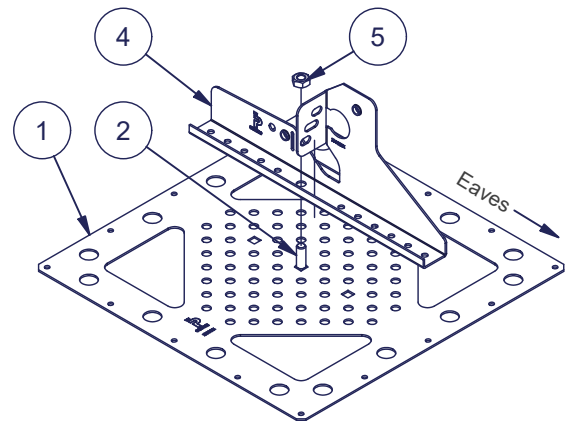


Attach the Locking brackets for ridge rail (6) to the outermost brackets (4) in each continuous length with two M8x16 bolts (7).

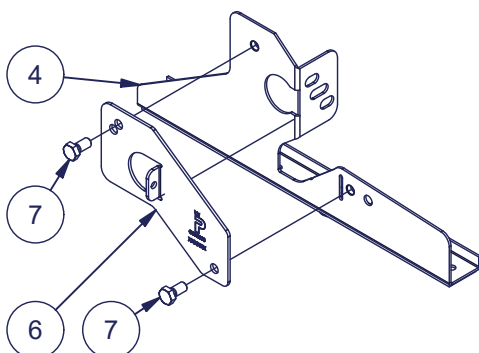


Slide the pipe (8) through holes of the brackets. Max protrusion from the outermost bracket 200 mm.

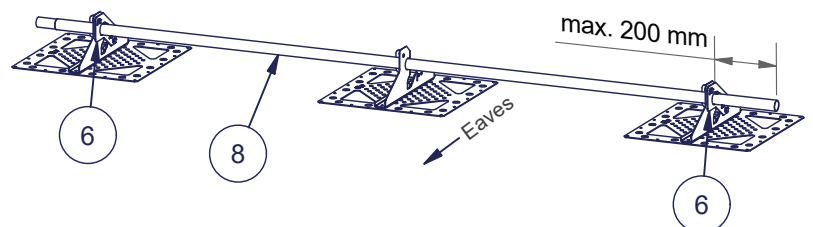

Attach the outermost brackets to the pipe with two fixing screws (9).

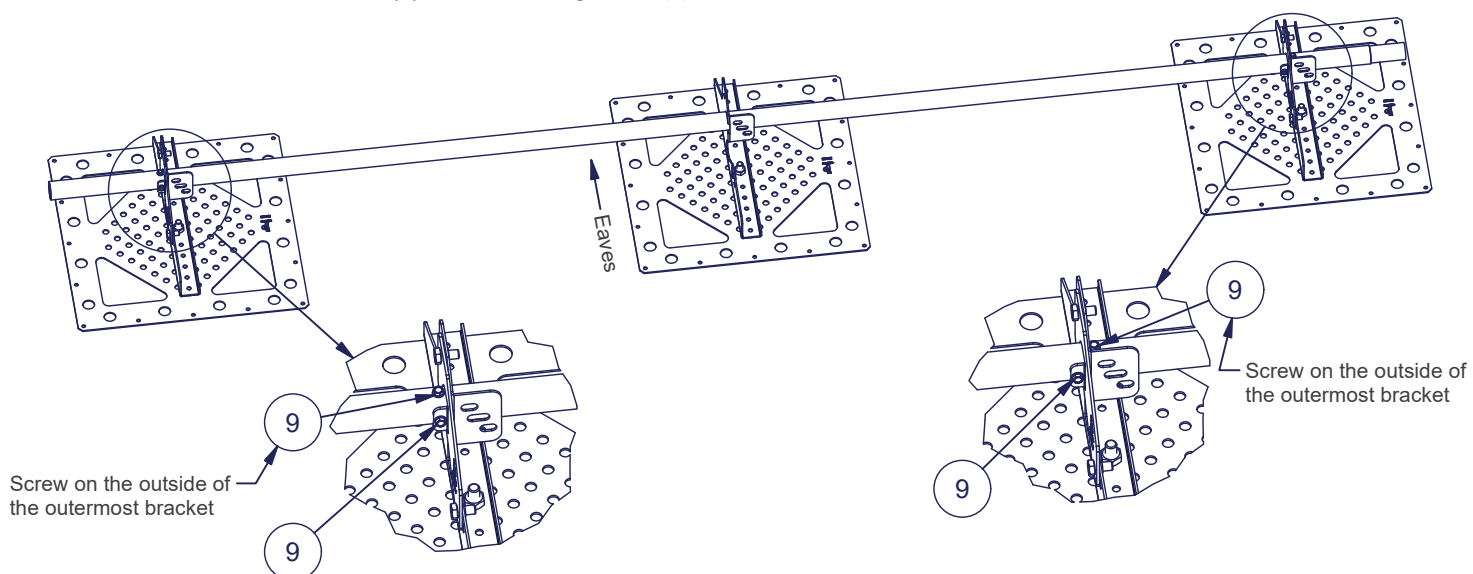

The extension of the pipes shall be done by sliding the pipe end with solid reducer inside the adjacent non-reduced pipe and fixing pipe fixing screws (9) (2 pcs/joint) through the pipe connections.



Part	Description
1	Mounting plate waterproofing membrane roof
2	Mounting plate bolt M10x30mm, stainless steel
3	Adhesive sealant
4	Bracket for sheet metal roofs
5	Nut M10, stainless steel
6	Locking bracket for ridge rail
7	Bolt M8x16 DIN 933 HDG
8	Snow guard pipe $\varnothing 32$
9	Fixing screw e.g. 4,8x25 self-tapping farmer screw or 4,8x19 self drilling screw

## USE

The ridge rail is intended as a fall arresting safety rope anchoring point. Since the rail and its fastening systems form a rigid unit, it can also be used to work while slightly leaning on the safety rope. The length of the safety rope should always be adjusted to prevent the user from falling over the edge of the roof. However, the system is not intended to be used as a suspended scaffold.

One person can be connected to one continuous ridge rail unit at the same time. The roof can be equipped with working areas with separate ridge rails, allowing several people to work on the same roof while attached to a safety rope.

Before each use, the system, including its attachments, must be checked to ensure that it is intact and firmly attached to its mounting platform.

When using the system, at least the following points must be taken into account:

- The ridge rail has been inspected periodically
- A safety rope (e.g. EN 353-2) or a safety reel (EN 360) used is compliant with regulations
- Only one user at a time may be attached to the ridge rail with safety rope. User's total weight with equipment may not exceed 100 kg.
- The safety rope shall never be attached to the fastener of the ridge rail, only to the ridge rail pipe.
- The safety rope shall be attached only to the area of the ridge rail pipe between the fasteners, never outside the outermost fastener.

## MAINTENANCE

Pisko products are hard-wearing and safe to use, guaranteed by the ongoing quality control and development work by Piristee Ltd, as well as correct installation of the products according to the manufacturer's instructions. To ensure the reliability and safety of the products, the property owner must carry out yearly inspection and maintenance procedures, and make sure that excessive snow load does not accumulate on the roof.

### Yearly maintenance inspection checklist for Pisko ridge rail:

- Check the tightness of joints, connections and attachments.
- Check the condition of the locking screws of the outermost fasteners.
- Check fixings to the roof
- Check the paintwork and zinc coating of the products; repair faults and touch up paintwork if necessary
- Replace or repair any damaged or faulty parts as soon as possible.



C900083